


AK72 / AK73 / AK76 / AK81

Profibus Connection Cable / Terminating Resistor

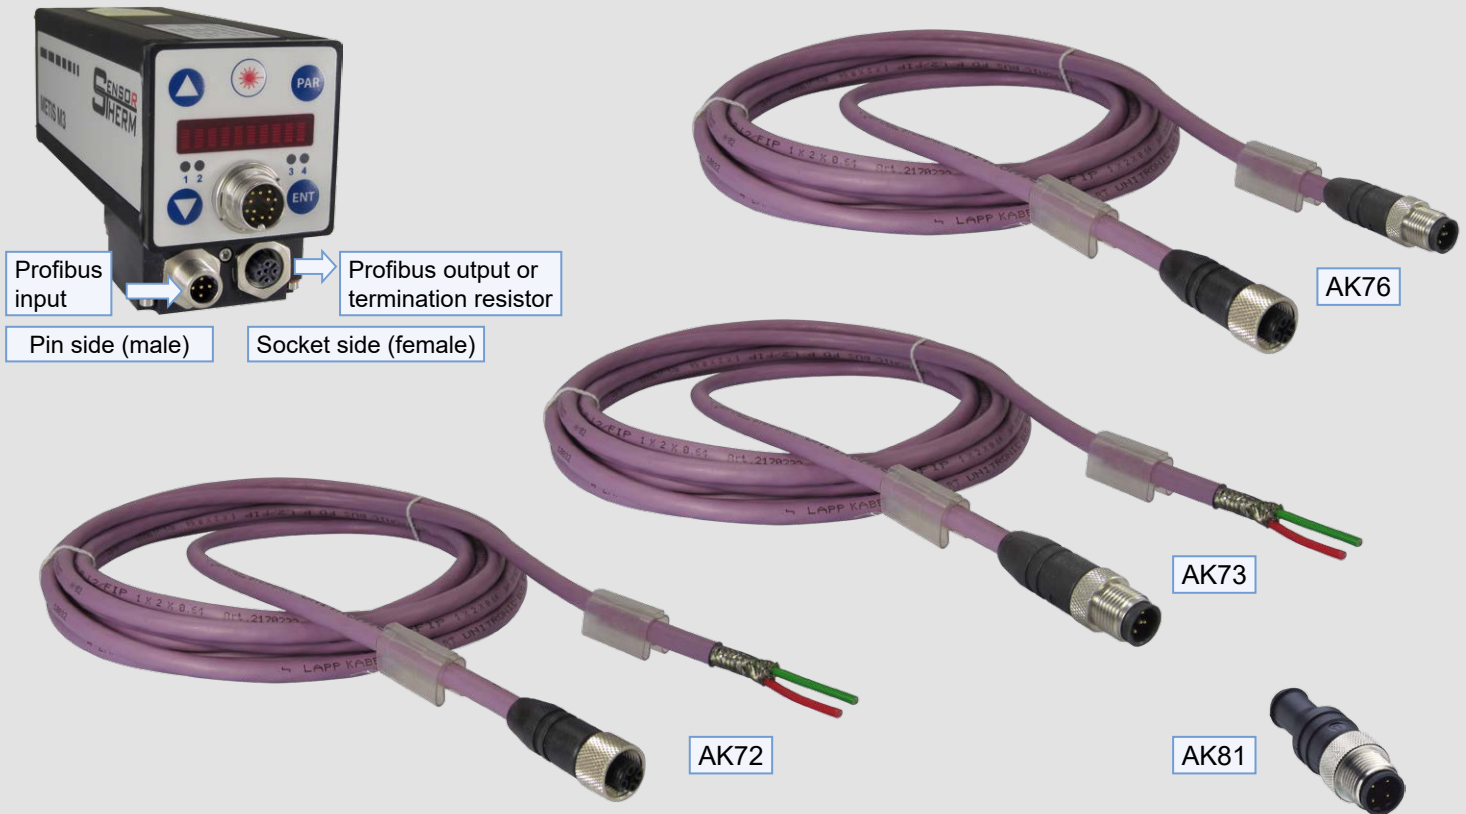

Reference numbers:

AK72-XX	Profibus input connection cable	(straight female connector and connection wires)
AK73-XX	Profibus output connection cable	(straight male connector and connection wires)
AK76-XX	Profibus input / output connection cable	(straight male and female connectors)
	for connecting 2 Profibus devices	
AK81-00	Terminating resistor	(male connector)

Technical Data:

Available cable lengths XX:	2, 5, 10, 15 m (to be specified when ordering)
Cable outside diameter:	7.8 mm ±0.2 mm
Cable minimum bending radius:	fixed installation: 440 mm; flexible installation: 65 mm
Cable overjacket material:	PUR
Cable flame resistance:	UL 1581, Sec. 1060 (FT-1); IEC 60332-1-2
Ambient temperature:	-25 to 80°C
Connectors:	M12 connector in molded polyurethane housing, tightening torque 0.4 Nm

www.sensortherm.com