

METIS M309 / 16 / 18 / 23

Versatile 1-Color Pyrometer Series



Highest Quality Measurements by

- Digital signal processing
- Continuous ambient temperature compensation
- Optimized optical components

1-color pyrometers for non-contact temperature measurement

- **Shortwave spectral ranges**
for measurements on metals, shiny materials, ceramics, graphite and many more
- **Versatile model types** due to modular design
 - Optics: focusable, optical fiber version, with motorized focus or fixed focus
 - Sighting method: laser targeting light, through-lens sighting or color camera
 - Optional integrated features: Profibus, Profinet, Ethernet or PID controller

Temperature ranges

from 100 – 700°C (212°F)
to 500 – 3300°C (5972°F)

Response time / Exposure time

< 1 ms
< 0.5 ms


Smallest possible spot size

0.4 mm

Digital, Precise, Versatile

Series M3 radiation pyrometers are fast and high-precision instruments that combine the versatility and benefits of digital signal processing.

Digital microcontroller signal processing ensures 100% reproducibility of displayed readings by computational integration of emissivity settings or continuous ambient temperature compensation.

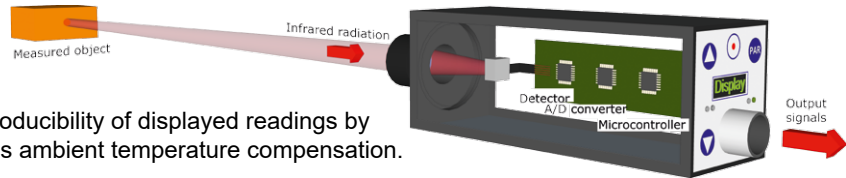

Technical Data

Model		M309	M316	M318	M323
Temperature ranges		550 – 1400°C	200 – 1300°C	100 – 700°C	50 – 800°C
		600 – 1600°C	250 – 1300°C	150 – 1200°C	80 – 1200°C
		650 – 1800°C	350 – 1800°C	180 – 1300°C	100 – 1500°C
		750 – 2500°C	400 – 2500°C		
		900 – 3000°C *)	500 – 3300°C **)		
		1000 – 3300°C *)			
Temp. sub ranges		Any temperature sub-range adjustable within the temperature range (minimum span 50°C)			
Spectral range		0.7–1.1 µm / *) 0.87 µm	1.45–1.8 µm / **) 1.4 µm	1.65–2.1 µm	2–2.6 µm
Detector		Silicon	InGaAs	InGaAs	InGaAs
Response time t_{90}		< 1 ms (with dynamical adaptation at low signal levels), adjustable up to 10 s			
Exposure time		< 0.5 ms			
Uncertainty		Full-scale temp. ≤2500°C: 0.25% of reading in °C + 1K			
($\epsilon = 1$, $t_{90} = 1$ s, $T_A = 23^\circ\text{C}$)		Full-scale temp. >2500°C: 0.5% of reading in °C			
Repeatability		0.1% of reading in °C + 1K			
($\epsilon = 1$, $t_{90} = 1$ s, $T_A = 23^\circ\text{C}$)		0.2% of reading in °C + 1K (min. 1.6°C)			
Temperature coefficient		From 10 to 60°C: 0.02%/K			
(deviation to 23°C)		From 0 to 10°C and 60 to 80°C: 0.04%/K			
2 analog outputs		0 or 4–20 mA, max. load: 500 Ω, resolution 0.0015% of the (adjusted) temperature (sub) range (16 Bit). Output 1: output of the measured temperature, output 2 adjustable: measured temperature, device temp., control output (devices with PID controller). Outputs can be set within or outside the temp. range.			
Serial interface		RS232 (4.8–115.2 kBd) or RS485 (4.8–921.6 kBd), switchable. Resolution 0.1°C / °F			
Inputs / outputs		12-pin connector: 3 configurable connectors (digital input, output or one analog input)			
		17-pin connector: 4 digital inputs, 2 digital outputs, 1 analog input.			
		<ul style="list-style-type: none"> Digital input (via supply voltage): laser targeting light on/off, clearing of peak picker, load a set of parameters, start / stop of measured value recording, PID controller start Digital output (12-pin devices: max. 50 mA, 17-pin devices: max. 100 mA): limit switch, beginning of temperature range exceeding, device measuring readiness, device over-temperature. 			
		Devices with PID controller: controller active, control process within limits, control process finished.			
PROFIBUS		Optional for 12-pin devices: Supports PROFIBUS DP-V0 (and DP-V1) according to IEC61158 type 3			
PROFINET	optional for 12-pin devices	Optional for 12-pin devices: Supports PROFINET-RT and IRT according to specification 2.3.			
Ethernet		Pre-certified, supports class A, B and C functionalities			
Display (only 12-pin devices)		Optional for 12-pin devices: Compliant with IEEE802.3/802.3u (Fast Ethernet) and ISO 802-3/IEEE 802.3 (10BASE-T)			
Device parameters		Dot Matrix, green-yellow, 128x32 dots, 5.6 mm high, for temperature display (resolution 0.1°C / °F) or parameter settings			
Power requirement		Temperature sub range, response time (<1 ms–10s), emissivity (0.050–1.200), transmittance (5–100%), spot size fill factor (5–100%), peak picker (clear settings: automatic, time clear or externally via digital input), device address (00–97), baud rate (RS232: 4.8–115.2 kBd / RS485: 4.8–921.6 kBd), analog outputs (0 or 4–20 mA), interface (RS232/RS485), temperature unit (°C/°F), device menu language (only 12-pin devices: English/German), focus distance (motorized focus devices)			
Isolation		24 V DC (18–30 V DC), max. 6 VA; protected against reverse polarity			
Sightings		Voltage supply, analog outputs and serial interface are galvanically isolated from each other			
		<ul style="list-style-type: none"> Through-lens sighting (can be darkened at high measuring temperatures) Laser targeting light (red: $\lambda=650$ nm, green: $\lambda=515$ nm, $P<1$ mW, laser class 2 according to IEC 60825-1) Color CCD camera (FBAS, ca. 1 V_{pp}, 75 Ω, CCIR, NTSC / PAL switchable; Resolution: NTSC: 720 x 480 px; PAL: 720 x 576 px; frame rate: NTSC: 60 Hz, PAL: 50 Hz), field of view: ca. 3.6% x 2.7% of measuring distance 			
		Laser targeting light (red: $\lambda=650$ nm, green: $\lambda=515$ nm, $P<1$ mW, laser class 2 according to IEC 60825-1)			
Ambient temperature		0 to 80°C (32 to 176°F), fiber optic devices on optics side: -20 to 250°C (-4 to 482°F)			
Storage		-20 to 85°C (-4 to 185°F)			
Relative humidity		Non-condensing conditions			
Housing/protection class		Aluminum / IP65 (with plugged in connector)			
Weight		650 g			
CE label		According to EU directives			

Ordering Specifications

Model to be specified with 12- or 17-pin connector, with temperature range, sighting method (red or green for laser targeting light), optics, if required Profibus, Profinet or Ethernet. For fiber optic devices, the optical fiber length between 2.5 and 30 m (in 2.5 m increments) is also required.

Scope of delivery: Device (fiber optic devices optionally with optics OL12 or OL25, special optics OQ30 with smaller spot sizes on request and at extra charge. Fiber optic: 2.5 m; each additional 2.5 m at extra cost), works certificate, operating manual, SensorTools software. Connection cables are not included and have to be ordered separately

Optics / Device Versions / Features

Integrated optics



With motor-
ized focus
(not M323)

Manually focusable

With fixed focus distance and very small spot sizes (on request, not M323)

Fiber optics, manually focusable (not M323)



Miniature:
OL12

Standard:
OL25


Special:
OQ30

Connections / Equipment options

All devices with

- **2 analog outputs**
- **RS232 / RS485 interface** (switchable)
- With **12-pin connector**: with display, adjustment keys and LED's for displaying operational readiness and active switching outputs, 3 configurable inputs / outputs, optional with integrated PID controller or with Profinet, Profibus or Ethernet.
- With **17-pin connection**: 4 digital inputs, 2 digital outputs, 1 analog input, PID controller

Sighting methods

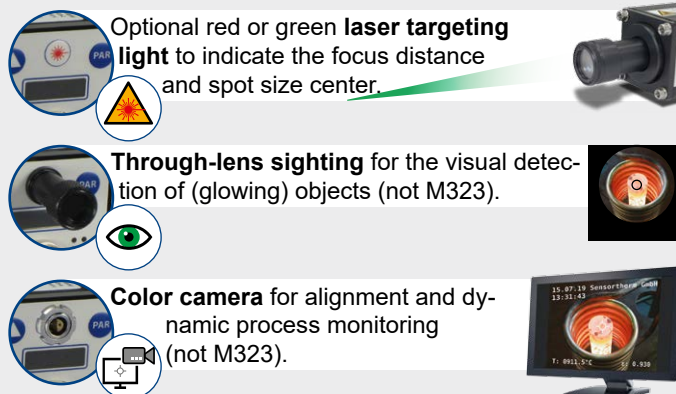


Optional red or green **laser targeting light** to indicate the focus distance and spot size center.

Through-lens sighting for the visual detection of (glowing) objects (not M323).

Color camera for alignment and dynamic process monitoring (not M323).

Ambient temperature




M309, M316 and M318 are optimized for **changing ambient or housing temperatures** between **0 and 80°C** (32 and 176°F), M323 up to 70°C.

Influences due to temperature fluctuations are continuously digitally compensated.

Optics Data

The **focus distance** is the measuring distance in which the **spot size is smallest**.

It can be continuously adjusted in the specified range for all focusable optics. Measurements outside the focus distance are also possible, but usually the spot size diameter is larger.

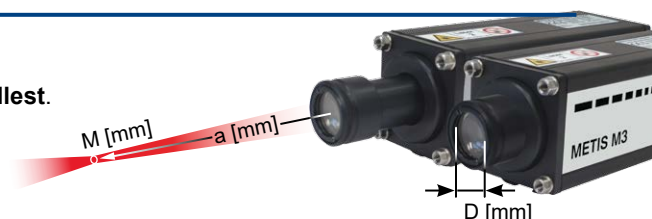

Optics:	Fiber optics								Integrated optics																	
Designation:	OL12-E3		OL25-				OQ30-90		OM09-B0				OV09-D1 / D2 *)				OM23-									
			G0		H0				A0		B0		C0		D1 / D2 *)		A0 B0 C0 D0									
Models:	M309		M309		M309		M309		M309		M309		M309		M309		M323									
	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316	M316											
FSC:	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	M318	all temperature ranges									
	700	rest	700	rest	700	rest	700	rest	700	rest	700	rest	700	rest	700	rest										
Focus distance a [mm]	Spot size Ø M [mm]																									
75			0.6	0.45																						
100	1.5	0.9	0.9	0.6													0.6									
130	2.2	1.25	1.3	1					0.6	0.4					0.9											
160	2.9	1.56	1.75	1.2					0.8	0.5																
170	3.1	1.67	1.78	1.3	1.6	1					0.87	0.53														
175	3.22	1.73	1.79	1.35	1.63	1.03					0.91	0.54					1									
180	3.34	1.8	1.8	1.4	1.67	1.05					0.95	0.55					1.04									
190	3.6	1.9					1.74	1.1					1	0.6	0.8	0.5					1.1					
200	3.8	2					1.8	1.15					1.1	0.65	0.85	0.54					1.17					
300	5.5	3.14					2.9	1.83					1.4	0.9					1.7	1.5						
340	6.2	3.6					3.34	2.1	1.3	0.8					1.7	1	1.3	0.8	1.8	0.9	1.8					
420	8.4	4.54					4.22	2.75	1.8	1.05					2	1.3	1.8	1.05	2.3	1.08	2.4					
500	10	5.5					5	3.2	2.3	1.3									2.3	1.3	2.5	1.2	3			
600	10.9	6					6	4.1	2.8	1.62									2.8	1.62	3	1.5	3.7			
700							7.5	4.8	3.3	2									3.3	2	3.8	1.9	4.4			
1000							11	7	4.5	2.9									4.5	2.9	5.6	2.8	6.5	7		
2000							23	15	10.5	6.1									10.5	6.1	10	4.7	14			
3000							34	22	14.3	9.6									14.3	9.6	15	8				
4000							45	29	18	13									18	13	19	11	29			
4500							52	34																		
7000																										
10000																										
Aperture D:	7 mm		13 mm						16 mm (FSC ≤ 1400°C); 8 mm (FSC > 1400°C)								26 mm									
Fiber Ø:	0.4 mm	0.2 mm	0.4 mm	0.2 mm	0.4 mm	0.2 mm	0.4 mm	0.2 mm									2) OV 09-D1 for M309:									

¹⁾ FSC = Full scale temp. value The values in the tables are exemplary, intermediate values can be interpolated.

2) OV 09-D1 for M309;
OV09-D2 for M316 and M318

SensorTools Software (included in delivery)

Communication and evaluation software for all pyrometers, controllers, digital displays and calibration sources.

- Measured value display, graphically and numerically, device temperature
- Measured value recording incl. parameters
- View and compare up to 4 measurement data files simultaneously in the *SensorTools Viewer*
- Make all device settings
- Special recording settings: externally start / stop, retroactive or extended recording via signal input
- Print or save pyrometer settings, or transfer settings to other devices or export to csv files
- Switch on / off laser targeting light, adjust camera settings or motorized focus (depending on features)



Accessories (selection)

Pyrometer assembly

Mounting bracket for pyrometers: HA10

Ball joint bracket for pyrometers: HA20

Mounting bracket for fiber optics: OL12: HA80
OL25 / OQ30: HA14

Connection cable

12-pin: with angled plug / straight: AL11 / 43

17-pin: only straight plug: AS54

Optional: with interface converter, integrated or via sub-D adapter (all cables available in 5m increments)

Elektrisch

Pyrometer connection kit, ready made: Wiring-Box

DIN rail power supply 24 V / 1.3 A: NG12-10

Protection

Water cooling housing: KG10

Air purge unit: BL12

Mounting bracket: HA12

Heavy ball joint bracket: HA22

Air purge units:

for fiber optics OL12: BL80

for fiber optics OL25/OQ30: BL14


for M323, fixed focus, motorized focus optics: BL10

for M309/16/18 with focusable optics: BL11

PID controller, programmable: Regulus RF/RD

LED digital display: IF00

Dimensions (in mm)

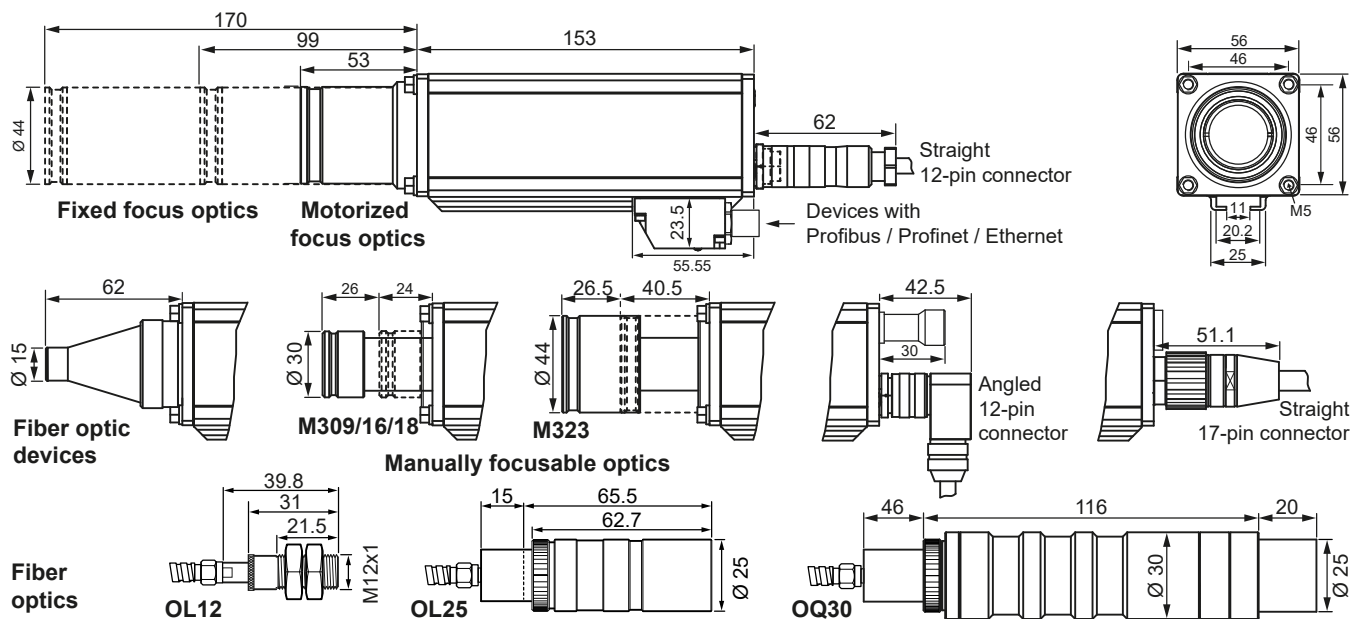

Sensortherm reserves the right to make changes in scope of technical progress or further developments.

Sensortherm-Datasheet_Metis_M309_M316_M318_M323 (July 25, 2024)

Sensortherm GmbH

Infrared Temperature Measurement and Control
Weißkirchener Str. 2-6 • D-61449 Steinbach/Ts.
Tel.: +49 6171 887098-0 • Fax: -989
www.sensortherm.com • info@sensortherm.com

